



08/01/00

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD

SUITE 500 EAST

FALLS CHURCH, VA 22042-1210

USA

(703) 205-8000

FAX (703) 205-8050

(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com

web: http://www.bskb.com

CALIFORNIA OFFICE
COSTA MESA, CALIFORNIATHOMAS S. AUCHTERLONIE
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUELLE, PH.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
JOHN CAMPA*
RICHARD J. GALLAGHERREG. PATENT AGENTS
FREDERICK R. HANDREN
MARYANNE ARMSTRONG, PH.D.
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, PH.D.
LAURA C. LUTZ
ROBERT E. GOOZNER, PH.D.
HYUNG N. SOHN
MATTHEW J. LATTIG
ALAN PEDERSEN-GILES
JUSTIN D. KARJALA
C. KEITH MONTGOMERY
TIMOTHY R. WYCKOFF
HERMES M. SOYEZ, PH.D.
KRISTI L. RUPERT, PH.D.TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III
GARY D. YACURAOF COUNSEL
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET.)*
F. PRINCE BUTLER
FRED S. WHISENHUNT

*ADMITTED TO A BAR OTHER THAN VA

Date: August 1, 2000Docket No.: 1982-0155Pjc886 U.S. PTO
09/630659
08/01/00Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): MISAWA, Takeshi

For: IMAGING SYSTEM

Enclosed are:

X A specification consisting of 39 pagesX 17 sheet(s) of Formal drawingsX An assignment of the inventionX Certified copy of Priority Document(s)X Executed Declaration X Original Photocopy A verified statement to establish small entity status under 37
CFR 1.9 and 37 CFR 1.27 Preliminary Amendment Information Disclosure Statement, PTO-1449 and reference(s)

00T030" 63065900

Other _____

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$690.00 *****	or	**** **** \$345.00 ****
TOTAL CLAIMS	21 - 20 =	1	x18 =\$ 18.00	or	x 9 = \$ 0.00
INDEPENDENT	4 - 3 =	1	x78 =\$ 78.00	or	x 39 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$ 0.00	or	+130 = \$ 0.00
TOTAL \$ 786.00				TOTAL \$ 0.00	

X A check in the amount of \$ 826.00 to cover the filing fee and recording fee (if applicable) is enclosed.

____ Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.


____ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

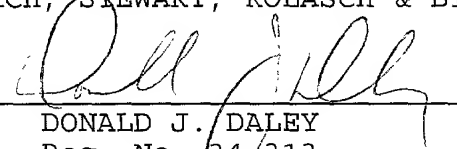
DONALD J. DALEY
Reg. No. 34/313
P. O. Box 747

(703) 205-8000
DJD/cqc

Falls Church, Virginia 22040-0747

007080" 6590E960

IMAGING SYSTEM

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an image display apparatus and an image photographing apparatus, and in particular, to an image display apparatus which displays an image represented by image information on a display device, and an image photographing apparatus which includes the image display apparatus.

Description of the Related Art

In general, an image photographing apparatus such as a digital still camera, a digital video camera, or the like is provided with a display device which is formed by an LCD or the like in order to enable confirmation of a photographed image or a played-back image at a time of photographing or playing back an image. Among various image photographing apparatuses, some apparatuses have a function in which the photographed image or the played-back image which is displayed on the display device can be displayed in an enlarged manner in accordance with a designation from a user. This function is effective, for example, in a case of confirming the focus or exposure at the time the image was photographed.

Japanese Patent Application Laid-Open (JP-A) No. 6-153071 discloses, in relation to the above-described art, an image signal processing mechanism in which image processing such as enlargement/reduction, rotation, or the like of an image can be easily

carried out when the stored image data is played back.

Here, in the image photographing apparatus, the resolution of the photographed image (the number of pixels of the image data obtained by photographing) is an important factor which relates to the image quality of the photographed image, and technology is advancing at a pace such that resolution becomes higher year by year. Accordingly, there arises a problem that when the photographed image or the played-back image which is displayed on the display device is displayed in an enlarged manner, it is difficult to know which portion of the original image is being displayed in an enlarged manner. Especially, when the original image is an image obtained by photographing a scene in which the same type of objects are aligned in succession, or the like, it is difficult to determine which portion of the original image is being displayed in an enlarged manner.

The above-described problem is not limited to image photographing apparatuses. In an apparatus which has functions of displaying an image on a display device and of displaying the displayed image in an enlarged manner (e.g., an apparatus which has a function of simply playing back an image), for example, when the surface area of a display surface of the display device is small and a display range when an image is displayed in an enlarged manner is limited, it is difficult to judge which portion of the image is being displayed in an enlarged manner.

SUMMARY OF THE INVENTION

The present invention has been developed in view of the aforementioned facts, and an object of the present invention is to provide an image display apparatus and an image photographing apparatus in which in a case of displaying a portion of an image, the range of the image which range is being displayed can be easily recognized.

In order to accomplish the above-mentioned object, a first aspect of a first invention is an image display apparatus, comprising: (a) a memory device having circuitry disposed therein for electronic storage and retrieval of information; (b) a display device having a display panel and circuitry for electronically displaying information on the panel; and (c) a display control device electronically connected to the memory device and the display control device, the display control device having electronic program logic, which when information is stored in the memory device representing an image, is operable for causing the display control device to retrieve the stored information and display a portion of the image represented by the stored information as a main image on the display device panel and range information indicating the portion of the image displayed in relation to the entire image represented by the stored information.

The first aspect of the first invention includes the memory device which stores image information and the display device for displaying the image. The memory device may be formed by, for example, a RAM or the like. The image information may be, as

recited in the sixth aspect of the first invention, for example, image information which is read out from an information storage medium, or may be image information which is outputted from a photographing device which converts an optical image to image information, or may be image information which is obtained by communication with another devices. The display device may be a transmission type dot matrix display as in the second aspect, or may be a reflection type dot matrix display, or may be another displays. Specifically, the display device may be structured by an LCD display, a CRT display, a plasma display, or the like.

When a portion of an image represented by the image information stored in the memory device is displayed on the display device as a main image, the display control device of the first aspect also displays visible information which represents a range, of the image represented by the image information, which range is being displayed as the main image. Accordingly, a user can easily visually recognize the range (specifically, the position, the shape, and the size of the range of the image) which is being displayed as the main image by viewing the displayed visible information. Therefore, according to the first aspect of the present invention, it is possible to easily recognize the displayed range, within the entire image, when a portion of the image is being displayed.

A third aspect of the first invention is the image display apparatus of the first aspect of the first invention, wherein the range information comprises a sub-image on the display device panel of the

entire image, superposed over a section of the main image.

In the third aspect of the first invention, a sub-image, whose display range is the entire image represented by the image information and in which the range which is being displayed as the main image is designated, can be displayed as the visible information at a smaller display magnification than that of the main image. Therefore, when the user views the displayed sub-image, the user can easily recognize not only the range of the image which is being displayed as the main image, but also the entire image represented by the image information. As a result, for example, in an aspect such as a fifth aspect of the present invention which will be described later and in which a size or a position of the range which is to be displayed as the main image can be changed by the user, the user can easily decide the range of the image which is to be displayed as the main image.

In the third aspect of the first invention, the range which is being displayed as the main image can be designated on the sub image by, for example, displaying, as the sub-image, an image on which a graphic form which represents a boundary between the range which is being displayed as the main image and a range other than the range which is being displayed as the main image is superposed, or displaying , as the sub-image, an image in which at least one of saturation, lightness, and hue of the range which is being displayed as the main image is different from that of the range other than the range which is being displayed as the main image.

Display of the main image and the sub-image may be, as in a fourth aspect of the present invention carried out by displaying the main image and the sub-image on a single display device, or, if a plurality of display devices are provided, by separately displaying the main image and the sub-image on the plural display devices. When the main image and the sub-image are displayed on the single display device, it is not necessary to add a new display device to display the sub-image, and therefore, manufacturing costs do not increase. When the main image and the sub-image are separately displayed on the plural display devices, there is no need to limit a display area of the main image in order to display the sub-image.

A fifth aspect of the first invention is the image display apparatus of the first aspect of the first invention, further comprising a designation device electronically connected to the display control device, the designation device being for selecting at least one of a position designating the portion of the image to be displayed, and a magnification size, wherein the electronic program logic determines the range information in accordance with a selection inputted via the designation device.

In the fifth aspect of the first invention, if the user designates via the designating device at least one of the size and the position of the range which is to be displayed as the main image, at least one of the size and the position of the range which is to be displayed as the main image is changed. Accordingly, it is possible to display, as the main image, any range of the image represented by the image

information. Therefore, it is possible to easily confirm or view any portion of the image represented by the image information.

A sixth aspect of the first invention is the image display apparatus of the first aspect of the first invention, wherein the stored information was read from an information storage medium and stored in the memory device. In the sixth aspect of the first invention, because an image represented by image information which is read out from an information storage medium is displayed on the display device, a portion of the image represented by the image information stored in the information storage medium can be easily confirmed or viewed.

An image photographing device of a first aspect of a second invention includes a photographing device which converts an optical image to image information, and the above-described image display apparatus. The display control device displays on the display device an image represented by image information which is outputted from the photographing device and stored in a memory device, or an image represented by image information which is read out from an information storage medium and stored in the memory device.

The first aspect of the second invention includes the photographing device which converts an optical image to image information, and the above-described image display apparatus. The display control device relating to the first aspect of the second invention displays on the display device an image (a photographed image) represented by image information which is outputted from the photographing device and stored in the memory device, or an image (a

played-back image) represented by image information which is read out from the information storage medium and stored in the memory device. Accordingly, in accordance with the first aspect of the second invention, when a portion of the photographed image or the played back image is displayed, as in the first aspect of the first invention, it is possible to easily recognize the range within the entire image, which range is being displayed.

A second aspect of the second invention is an apparatus for photographic imagery of the first aspect of the first invention, further comprising an optical finder for viewing an optical image for conversion by said photography device to electronic image information representative of the optical image, wherein the display device includes another display panel and when the stored information has been outputted from the photography device into the memory device, the electronic program logic displays as main image the entire image represented by the stored information, and a portion of the entire image, the another display panel with the range information being indicated as a differential portion of the main image.

In the second aspect of the second invention, the optical finder for visually confirming the optical image which is converted to image information by the photographing device is provided. An image which represents the range which is being displayed as the main image is displayed as visible information in a superposed manner on the image which is being viewed via the optical finder. As described above, displaying the image, which represents the range which is

embodiment seen from the front, and Fig. 1B is a perspective view of the digital still camera of the first embodiment, seen from the back .

Fig. 2 is a block diagram which shows a schematic structure of an electric system of the digital still camera shown in Figs. 1A and 1B.

Figs. 3A and 3B are flowcharts which show contents of an image display processing.

Fig. 4A is a concept view for explaining a processing carried out in a case of displaying a portion of an image in an enlarged manner, and Fig. 4B is an imaginary view of an example in which an enlarged image and a navigation image which is superposed on the enlarged image are displayed on a single display.

Fig. 5 is an imaginary view of an example in which a displayed image is switched in accordance with a designation for switching a display mode.

Fig. 6 is an imaginary view of another example in which the displayed image is switched in accordance with the designation for switching the display mode.

Fig. 7 is an imaginary view of an example in which an enlarged image and a navigation image are respectively displayed on a single display such that they do not overlap each other.

Figs. 8A and 8B are imaginary views of an example in which an enlarged image and a navigation image are displayed such that they do not overlap each other by using a display in which an aspect ratio of a display surface is different from a displayed image.

Figs. 9A is a perspective view of a digital still camera of a second

embodiment, seen from the front and Fig. 9B is a perspective view of the digital still camera of the second embodiment, seen from the back surface.

Fig. 10 is a block diagram which shows a schematic structure of an electric system of the digital still camera shown in Figs. 9A and 9B.

Figs. 11A and 11B are imaginary views of an example in which an enlarged image is displayed on a main display and a navigation image is displayed on a sub display.

Fig. 12 is an imaginary view of an example in which a graphic form, which represents a position and a size of an enlarged display range, is displayed on a sub display.

Fig. 13 is an imaginary view of an example in which a light-transmittable pattern which represents a position and a size of an enlarged display range is displayed on a liquid crystal display, which is disposed so as to superpose an optical finder.

Figs. 14A and 14B are imaginary views of an example in which, in an aspect that a plurality of displays are provided, an index image and a single image contained in the index image are respectively displayed.

Fig. 15 is a block diagram of an example of a schematic structure of an image display apparatus.

Fig. 16 is a block diagram of another example of a schematic structure of an image display apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will be explained in detail hereinafter with reference to the drawings.

First Embodiment

Fig. 1 shows a digital still camera 10 relating to a first embodiment. The digital still camera 10 has, as described later, a function as an image display apparatus recited in the first aspect of the first invention and the like, and corresponds to an image photographing apparatus recited in the first aspect of the second invention.

As illustrated in Fig. 1, a main body 12 of the digital still camera 10 is formed in a substantial box shape, and a protrusion (grip portion) for easy grip of the main body 12 is formed at the left side of the main body 12, seen from the front. As illustrated in Fig. 1A, a lens 14 is mounted at a center of the front surface of the main body 12. An optical finder 16 for a user to visually confirm a range to be photographed or the like, and a flash 18 for emitting auxiliary light when an image is photographed at a low illumination level or the like, are mounted above the lens 14 of the main body 12.

A power switch 20 is provided at the right side, seen from the front, of the top surface of the main body 12 and a shutter button 22 is provided at the left side (a position which corresponds to the grip portion), seen from the front, of the top surface of the main body 12. A slot 24, into which a memory card (not shown) which serves as an information storage medium can be loaded, is provided at the right side surface of the main body 12, seen from the front.

As illustrated in Fig. 1B, a color display 26 (which may be a monochrome display), which is formed by a reflection type display device or a transmission type display device (for example, an LCD), is mounted at

a lower side of the back surface of the main body 12. A menu switch 28, an execution/view changing switch 30, and an operation switch 32 are respectively mounted above the display 26.

Fig. 2 shows a structure of an electric system of the digital still camera 10. The lens 14 is specifically a zoom lens (a focal distance varying lens) having an automatic focusing (AF) mechanism. The AF mechanism and the zoom mechanism of the lens 14 are driven by a driving circuit 36. Instead of the zoom lens, a focal distance fixing lens having only the AF mechanism may be used as the lens 14.

A photographing device 38 which is structured by an area CCD sensor or the like is disposed at a position corresponding to a focal position of the lens 14 within the main body 12. Light, which is reflected by a subject and made incident on the lens 14, is imaged on a light receiving surface of the photographing device 38. The photographing device 38 is driven at a timing which is synchronized with a timing signal generated by a timing generation circuit (not shown) which is included in the driving circuit 36, and outputs an image signal (a signal which represents an amount of light received in respective plural photoelectric conversion cells arranged in a matrix on the light receiving surface).

A shutter/diaphragm 40 is disposed between the lens 14 and the photographing device 38. The shutter/diaphragm is driven by the driving circuit 36. The shutter is designed to prevent smear from being generated due to the incidence of light on the light receiving surface of the photographing device 38 when the image signal is outputted from the photographing device 38. The shutter may be omitted depending on the

photographing device 38, the analog signal processing section 42, the A/D converter 44, and the digital signal processing section 46 correspond to a photographing device of the present invention.

The driving circuit 36, the analog signal processing section 42, the A/D converter 44, the digital signal processing section 46, the memory 48 and, a compression and decompression section 50 (to be described later) are connected to a bus 52. A CPU 54 is connected to the bus 52. Switches (which are referred to as "operation switches" in Fig. 2) such as the power switch 20, the menu switch 28, the execution/view changing switch 30, the operation switch 32 and the like, and a shutter switch 56 which is turned on and off by operating the shutter button 22 are also respectively connected to the bus 52. The CPU 54 includes a peripheral circuit (not shown) such as a ROM, a RAM, an input/output port or the like.

The display 26 and the compression and decompression section 50 are respectively connected to the memory 48. When an image is to be displayed on the display 26, the CPU 54 carries out image display processing, which will be described later, upon the image data which is temporarily stored in the memory 48, and then transmits the image data to the display 26. As a result, the image which is represented by the image data which is temporarily stored in the memory 48 is displayed on the display 26.

When storage of the image data to the memory card which is loaded into the slot 24 is designated by operating the shutter button 22 so as to turn on the shutter switch 56, the CPU 54 reads out the image data

display an image in an enlarged manner by an electronic magnification-changing processing. If displaying the image in an enlarged manner by the electronic changing magnification is not to be carried out (if the entire image represented by image data which is stored in the memory 48 is to be displayed on the display 26), the process proceeds to step 102. In step 102, the pixel density of the image data which is stored in the memory 48 is converted on the basis of the number of pixels of the display 26 (i.e., the pixel density is converted such that the number of pixels of the image represented by the image data in vertical and horizontal directions coincides with the number of pixels of the display 26 in the vertical and horizontal directions).

In next step 104, the image data, whose pixel density has been converted, is expanded in an image-data-for-display storage region (bit map memory) which is provided in the memory 48 in advance. Then, the process proceeds to step 126. In step 126, the image data which is stored in the image-data-for-display storage region is transmitted to the display 26. Accordingly, the entire image represented by the image data which is stored in the memory 48 is displayed on the entire display 26. In step 128, a determination is made as to whether displaying of the image is finished. If the answer to the determination in step 128 is "No", the process returns to step 100 and steps after step 100 are repeated.

The operation switch 32 which is provided at the back surface of the main body 12 of the digital still camera 10 is provided with switches corresponding to upper, lower, right and left end portions of a substantially square button. When an end portion of the button is

pressed, a corresponding switch is turned on. In the image photographing mode, the operation switch 32 is used to designate to switching of the zoom magnification. When the zoom magnification is to be increased, the upper switch is turned on, and when the zoom magnification is to be reduced, the lower switch is turned on.

In accordance with turning on or off the upper or lower switch of the operation switch 32, the CPU 54 changes the optical magnification of the optical finder 16 as well as the optical magnification (focal distance) of the lens 14. If an image is being displayed on the display 26, an image corresponding to the optical magnification of the lens 14 is displayed on the display 26. In the image photographing mode, the image data which is stored in the memory 48 is periodically updated by the image signal which is periodically outputted from the photographing device 38. While the zoom magnification is switched only by changing the optical magnification of the lens 14, as described above, the answer to the determination in step 100 is not affirmative. Accordingly, the entire image represented by the image data which is stored in the memory 48 is always displayed on the entire display 26.

In the image photographing mode, when increasing the zoom magnification is further designated via the operation switch 32 when the optical magnification of the lens 14 is maximized, if an image is being displayed on the display 26, it is determined that displaying an image in an enlarged manner needs to be carried out by the electronic changing magnification processing. Then, the answer to the determination in step 100 is affirmative. In the electronic changing magnification processing in

the image photographing mode, the central position of an enlarged display range always coincides with the central position of an original image.

On the other hand, in the image play back mode, the operation switch 32 is used to designate switching of the image display magnification and moving of the image display range. That is to say, when the upper or lower switch is simply turned on or off, it means that changing the image display magnification is designated. When the image display magnification is to be increased, the upper switch is turned on, and when the image display magnification is to be reduced, the lower switch is turned on. When any one of the upper, lower, right, or left switches is turned on or off in a state that a button (not shown) is being pressed, it means that changing the image display range is designated. Then, a switch corresponding to a direction in which the image display range is to be moved is turned on in a state that the unillustrated button is being pressed.

In the image play back mode, an initial value of the image display magnification is a magnification (i.e., a minimized magnification) at which the entire image represented by the image data is displayed on the entire display 26. When switching the image display magnification (i.e., displaying the image in an enlarged manner) is designated via the operation switch 32, and when moving the enlarged display range is designated via the operation switch 32, it is determined that the image needs to be displayed in an enlarged manner by the electronic changing magnification processing. Accordingly, the answer to the determination in step 100 is affirmative. In the electronic changing magnification

The above-described steps 110 to 126 are repeatedly carried out while the answer to the determination in step 128 is negative and the answer to the determination in step 100 is affirmative. Accordingly, if changing the zoom magnification, switching the image display magnification, or moving the enlarged display range is designated by the user's operating the operating switch 32 again, the enlarged display range is changed, and in accordance with this change of the enlarged display range, the size of the frame 84 and the position of the frame 84 on the navigation image 82 are changed.

In the above-described embodiment, a case has been explained, in which the enlarged image 80 is continuously displayed while the image is displayed in an enlarged manner by the electronic changing magnification processing, and the navigation image 82 is superposed on the enlarged image 80 and continuously displayed in the upper right corner of the enlarged image 80. Instead of the above-described case, for example, each time a switching of the display mode is designated by operating the menu switch 28 or the operation switch 32, as shown in Fig. 5, it is possible to successively switch to a state in which only the enlarged image 80 is displayed on the display 26, a state in which only the navigation image 82 is displayed on the display 26, and a state in which the enlarged image 80 and the navigation image 82 are respectively displayed on the display 26.

As a result, the user can easily confirm a portion of the enlarged image 80 on which the navigation image 82 is superposed in the range of the image which is displayed as the enlarged image 80, or can confirm in

detail the position or the size of the enlarged display range by making reference to the navigation image 82. Each time a switching of the display mode is designated, as shown in Fig. 6, for example, it is possible to successively switch to, in addition to the above-mentioned three states, a state of displaying a set-up image 86 which enables switching of modes such as whether or not a flash is to be used, whether or not exposure correction is to be carried out, or an AE mode or the like, i.e., it is possible to successively switch to a fourth state.

Instead of switching the image displayed on the display 26 in accordance with the designation for switching the display mode as described above, for example, as shown in Fig. 7, the enlarged image 80 and the navigation image 82 may be respectively displayed on a display surface of the display 26 such that they do not overlap each other. When the aspect ratio of the enlarged image 80 or the navigation image 82, is the same as that of the display surface of the display 26 or the like, a region in which no image is displayed is generated within the display surface of the display 26. Therefore, in an example shown in Fig. 7, by displaying photographing information or set-up information in the region, the display surface of the display 26 can be efficiently used.

In the aspect that the enlarged image 80 and the navigation image 82 are respectively displayed such that they do not overlap each other as described above, as shown in Figs. 8A and 8B, the aspect ratio of the display surface of the display 26 may be different from that of the enlarged image 80 or the navigation image 82. Fig. 8A shows an example in which the ratio of the horizontal length of the display surface of the

display 26 to the vertical length thereof is larger than that of the displayed image. Fig. 8B shows an example in which the vertical length of the display surface of the display 26 is longer than the horizontal length thereof. As compared with the example shown in Fig. 7, a region within the display surface in which the image is not displayed can be made smaller and therefore the display surface of the display 26 can be used more efficiently.

Second Embodiment

Next, a second embodiment of the present invention will be described. The same portions as those of the first embodiment are designated by the same reference numerals, and descriptions thereof are omitted.

As illustrated in Fig. 9, in a digital still camera 60 relating to the second embodiment of the present invention, a small size display 62, which is formed by a reflection type display device or a transmission type display device (for example, an LED) and is smaller than the display 26, is mounted at a right side of the display 26 on a back surface of a main body 12. Hereinafter, the display 26 is referred to as a "main display 26" and the display 62 is referred to as a "sub display 62". The sub display 62 may be a monochrome display or may be a color display. The main display 26 and the sub display 62 correspond to "a plurality of displays" recited in the forth aspect of the first invention.

As illustrated in Fig. 10, as well as the main display 26, the sub display 62 is connected to the memory 48. An image which is represented by image data which is transmitted from the memory 48 to

the sub display 62 is displayed on the sub display 62. A dot matrix display 64 (not shown in Fig. 9) for displaying photographing information or set-up information is also connected to the bus 52. The dot matrix display 64 is not an essential component and can be substituted with the main display 26 or the sub display 62.

An operation of the second embodiment of the present invention will be explained. In the second embodiment, when the electronic changing magnification processing is carried out, for example, as shown in Fig. 11A, an enlarged image 80 is displayed on the entire display surface of the main display 26 and a navigation image 82 is displayed on the entire display surface of the sub display 62. Accordingly, as in the first embodiment, a user can easily grasp the overall image and can easily visually recognize a range of the image which is being displayed as the enlarged image 80. Because the enlarged image 80 and the navigation image 82 do not overlap and respective images are displayed on the displays 26 and 62 respectively, respective portions of the enlarged image 80 can be easily confirmed.

The present invention is not limited to displaying the enlarged image 80 on the main display 26 and the navigation image 82 on the sub display 62. When switching the display mode is designated, for example, as shown in Fig. 11B, the navigation image 82 may be displayed on the main display 26 and the enlarged image 80 may be displayed on the sub display 62. The user can easily confirm in detail the position or the size of the enlarged display range by making reference to the navigation image 82 which is displayed on the main display 26.

Although there has been explained the case in which the enlarged image 80 or the navigation image 82 is displayed on the sub display 62, the present invention is not limited to this case. For example, as shown in Fig. 12, the position and the size of the enlarged display range may be simply displayed by displaying a graphic form 88 which represents the position and the size of the enlarged display range in the entire image on the sub display 62. This graphic form also corresponds to visible information in accordance with the present invention. As described above, (it is possible to use a low cost display in which the number of pixels is small and an image is difficult to be displayed with an image quality level which is at least higher than a predetermined level). Accordingly, cost reduction of a digital still camera can be realized.

Instead of displaying the navigation image on the display 26 or 62, or displaying the graphic form 88, the enlarged display range may be designated as follows. For example, a crystal liquid display is disposed so as to be superposed on an optical finder 16. Then, as shown in Fig. 13, among respective cells of the liquid crystal display, light transmittance of cells within the enlarged display range on the image which is visually confirmed by the user via the optical finder 16 is made different from that of cells outside the enlarged display range. A light-transmittable pattern which is displayed on the liquid crystal display also corresponds to visible information (the image recited in the second aspect of the second invention) relating to the present invention.

In this way, the image (light-transmittable pattern) which is displayed on the liquid crystal display is superposed on the image which

is to be imaged by the optical finder 16. When the user looks through the optical finder 16, the user will visually confirm an image in which lightness of the inside of the enlarged display range is different from that outside of the enlarged display range, and therefore the user can easily recognize the position and the size of the enlarged display range.

Further, for example, if the size of the enlarged display range can be gradually changed with the central position thereof being fixed, instead of displaying the light-transmittable pattern on the liquid crystal display which is disposed so as to be superposed on the optical finder 16 as described above, the image which represents the enlarged display range can be displayed as follows. For example, light transmittable patterns (or graphical forms shown in Fig. 12) which correspond to various sizes of the enlarged display range are respectively recorded on a plurality of transparent sheets. Then, a sheet whose size corresponds to the current size of the enlarged display range is selectively inserted to an optical path.

Fig. 4B and the like show an example in which a boundary between the inside of the enlarged display range and the outside thereof is designated by the frame 84 which is formed by a line having high density, but the present invention is not limited to this example. The frame may be formed by a line having low density (for example, a white line) or may be formed by a line having low saturation. Instead of the frame, for example, at least one of lightness, saturation and hue of an image may be changed between the inside and the outside of the enlarged display range (for example, outside of the enlarged display range is set at low lightness or low saturation, or hue of the outside of the enlarged display range is

changed to a complementary color of the original color or the like). The enlarged display range is formed in a rectangle which has a constant aspect ratio, but the present invention is not limited to this case. The aspect ratio of the enlarged display range may be optionally determined or the enlarged display range itself may be optionally changed.

Image information of the present invention is not limited to image data which represents a single image. Image data, which represents a state in which a plurality of images are arranged in a matrix (a so-called index image), may be used as image information of the present invention. For example, in the aspect in which a plurality of displays are provided as in the second embodiment, image data of the plural images which are stored in a memory card or the like is edited as image data which represents an index image and is stored in the memory 48. Then, as shown in Figs. 14A and 14B, an index image 90 is displayed as a navigation image on the main display 26 and one image 92 of the plural images contained in the index image 90 is displayed as an enlarged image on the sub display 62. Details of respective image can be confirmed by making reference to the image displayed on the sub display 62, and therefore, a large number of images can be displayed as the index image on the main display 26. For example, images represented by a large number of image data stored in the memory card can be easily understood.

In the above-described description, a digital still camera has been explained as the image photographing apparatus recited in the first aspect or the second aspect of the second invention, but the present invention is

not limited to the same. It is needless to say that a digital video camera can be applied to the present invention.

An image photographing apparatus has been explained, which has a function as the image display apparatus recited in any one of the first aspect to the sixth aspect of the first invention, but the invention recited in the first aspect to the sixth aspect of the first invention is not limited to applying to an image photographing apparatus. It is possible to use the present invention as an image display apparatus which reads out image data which is stored in an information storage medium such as a memory card, a CD-R, or the like and displays the image data on a display device such as a display or the like.

For example, Fig. 15 shows a schematic block diagram of an image display apparatus 70 in which a single display 26 is provided as in the digital still camera shown in Figs. 1 and 2. Fig. 16 shows a schematic block diagram of an image display apparatus 72 in which a main display 26 and a sub display 62 are provided as in the digital still camera 60 shown in Figs. 9 and 10. When the present invention recited in any one of the first aspect to the sixth aspect of the first invention is applied to these image display apparatuses and the image is displayed in an enlarged manner by the electronic changing magnification processing, visible information relating to the present invention (navigation image, graphic form or image which represents the enlarged display range) may be displayed.

Although embodiments of the present invention have been explained, the above embodiments include aspects described below.

(1) An image display apparatus according to the first aspect of the first invention, wherein an image represented by image information is an index image in which a plurality of images are arranged in a matrix, and a display controller displays one of the plurality of images contained in the index image as a main image.

(2) An image display apparatus according to the sixth aspect of the first invention, wherein image information obtained by photographing with the image photographing apparatus is stored in an information storage medium.

WHAT IS CLAIMED IS:

1. An image display apparatus, comprising:
 - (a) a memory device having circuitry disposed therein for electronic storage and retrieval of information;
 - (b) a display device having a display panel and circuitry for electronically displaying information on the panel; and
 - (c) a display control device electronically connected to the memory device and the display control device, the display control device having electronic program logic, which when information is stored in the memory device representing an image, is operable for causing the display control device to retrieve the stored information and display a portion of the image represented by the stored information as a main image on the display device panel and range information indicating the portion of the image displayed in relation to the entire image represented by the stored information.
2. The image display apparatus of Claim 1, wherein the stored information in said memory device is image information outputted from a photography device, wherein the photography device produces the image information from optical information.
3. The image display apparatus of Claim 1, wherein the stored information in said memory device is image information acquired by communication with another device.

designating the portion of the image to be displayed, and a magnification size, wherein said electronic program logic determines the range information in accordance with a selection inputted via said designation device.

10. The image display apparatus of Claim 1, wherein said stored information was read from an information storage medium and stored in said memory device.

11. The image display apparatus of Claim 1, wherein the image represented by said stored information is an index image in which a plurality of images are arranged in matrix format, and said electronic program logic displays as said main image, any one image of the plurality of images.

12. An apparatus for photographic imagery, the apparatus comprising:

(a) a photography device operable for receiving an optical image and producing electronic image information representative of the optical image; and

(b) an image display device electronically connected to the photography device, the image display device including:

(i) a memory device having circuitry disposed therein for electronic storage and retrieval of information;

(ii) a display device having a display panel and circuitry for electronically displaying information on the panel; and

and a display device for displaying an image, the method comprising the steps of:

(a) displaying a portion of the image represented by the information stored in the memory device as a main image; and

(b) displaying range information indicating the portion of the image displayed in relation to the entire image represented by the stored information.

15. The image display method of Claim 14, wherein the display device comprises a transmission type dot matrix display.

16. The image display method of Claim 14, wherein the step of displaying range information includes displaying the range information as a sub-image, which is smaller than the main image, wherein the sub-image displays the entire image that the stored information represents, sized to fit within the sub-image.

17. The image display method of Claim 16, wherein if the image display apparatus comprises a second display device, the step of displaying range information includes displaying the main image on one display device and the sub-image on the other display device, and if the image display apparatus includes a single display device, displaying the sub-image superposed over a section of the main image on the display device.

information outputted from said photographic device.

21. The image display method of Claim 20, wherein said image photographic apparatus includes an optical finder for viewing an optical image for conversion by said photography device, and the step of displaying range information includes displaying the range information as a sub-image superposed on an image which is being viewed via said optical finder, when said portion of an image is being displayed as a main image on the display panel, from image information stored in said memory device from said photographic device.

ABSTRACT OF THE DISCLOSURE

When a portion of an image is displayed, a range of the image which is being displayed can be easily recognized. Namely, when enlarged image data which corresponds to an enlarged display range shown by hatching is extracted from image data and displayed on a display, a portion of the image which is represented by the enlarged image data is displayed on the entire display surface of the display. Original image data is processed such that a frame which represents the enlarged display range is synthesized with the image represented by the original image data, and resultant image data is displayed, as a navigation image, in an upper right corner of the display surface of the display.

FIG. 1 A

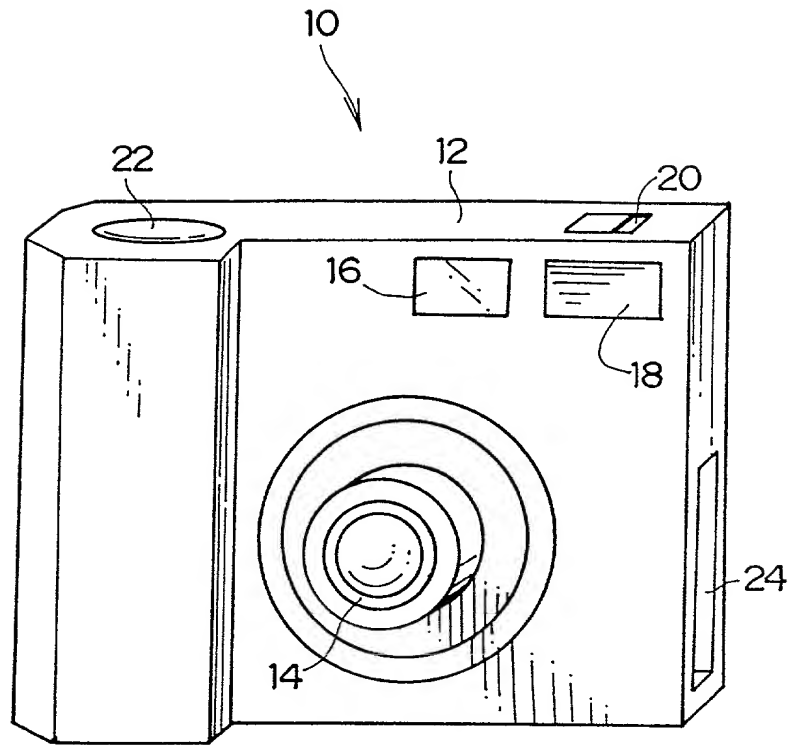


FIG. 1 B

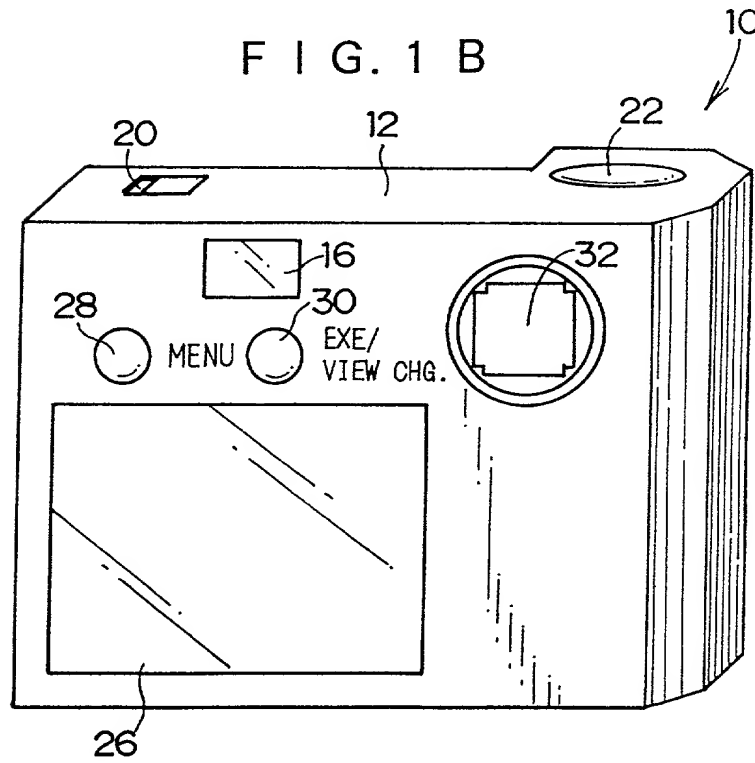


FIG. 3 A

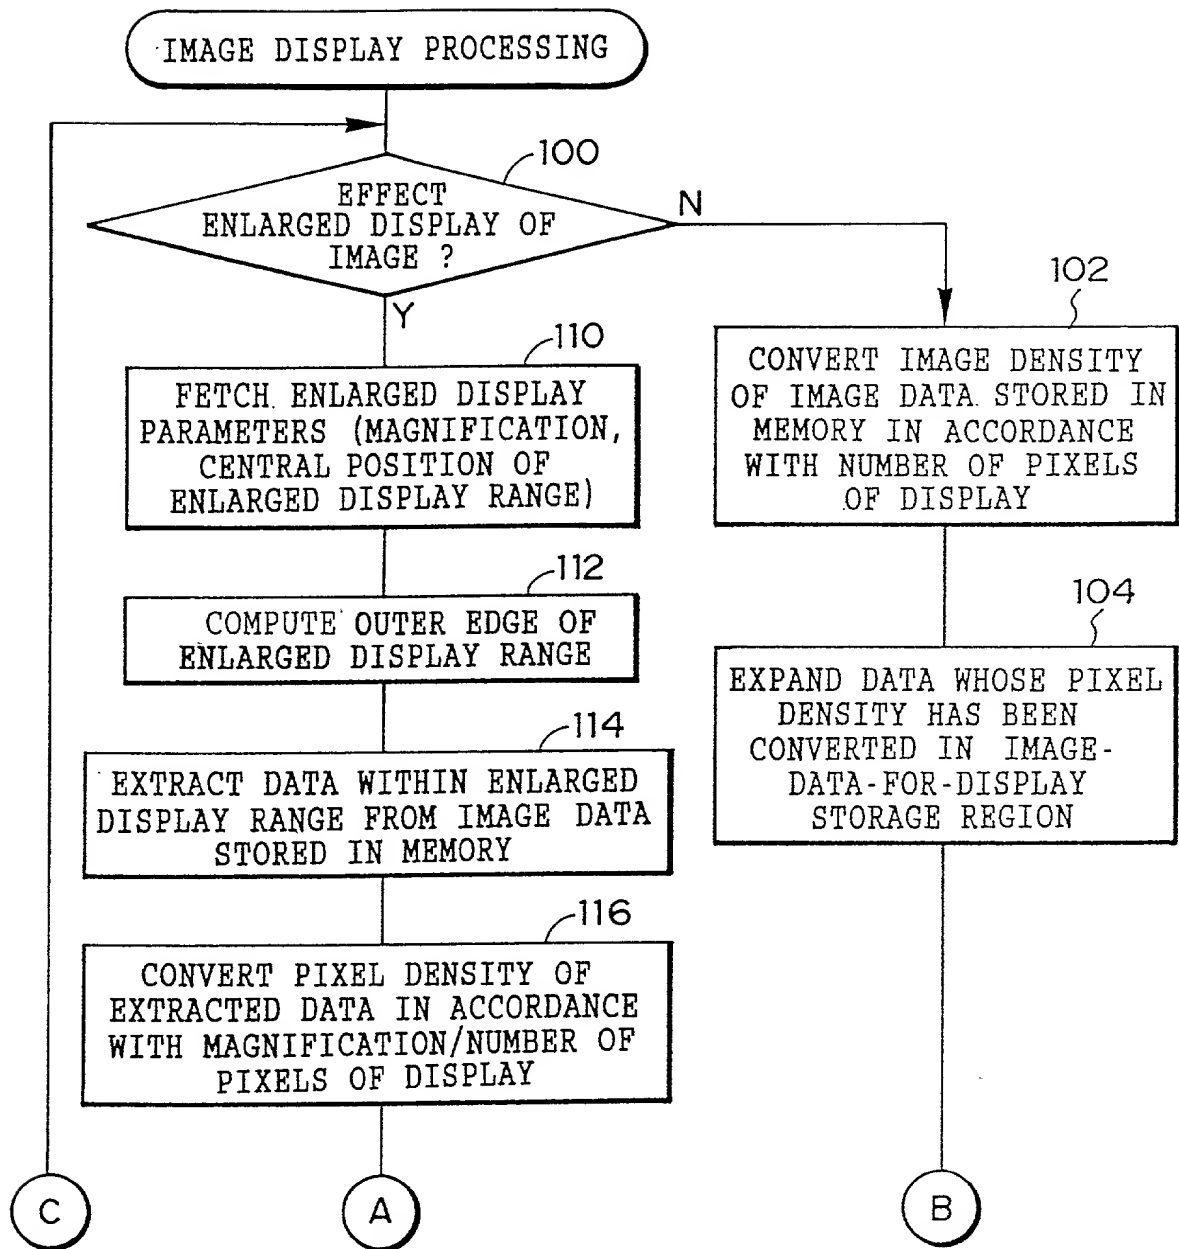


FIG. 4 A

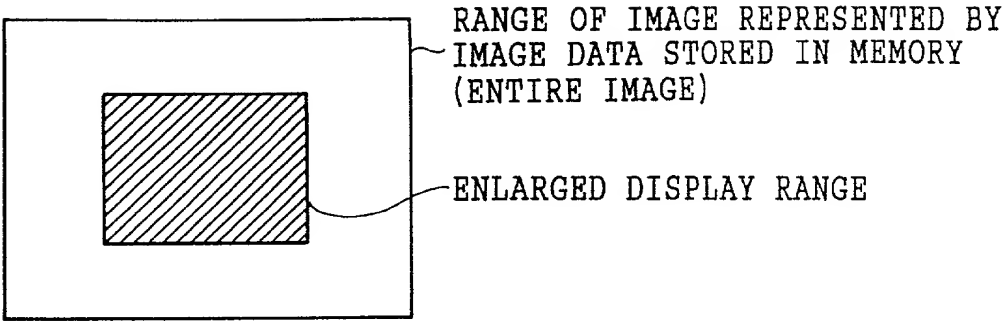


FIG. 4 B

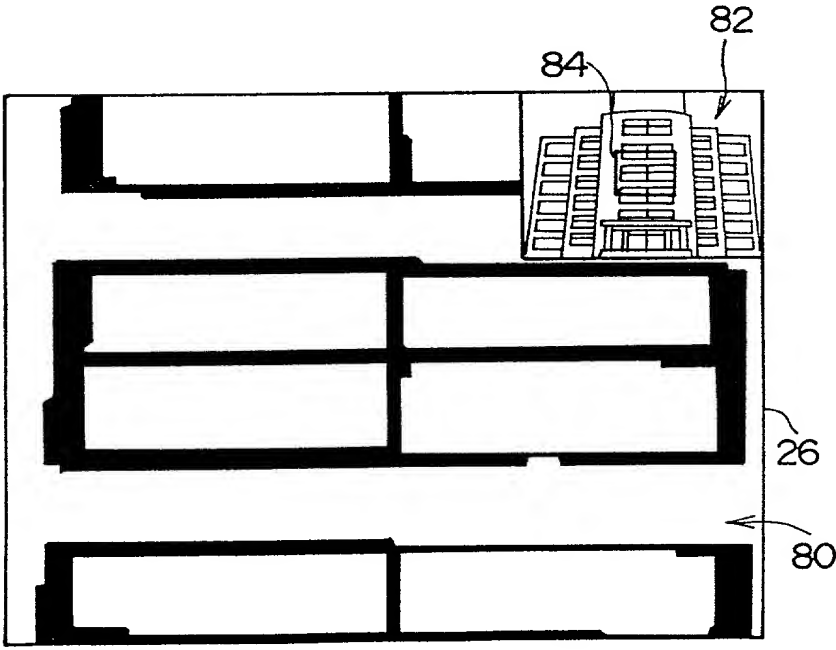


FIG. 5

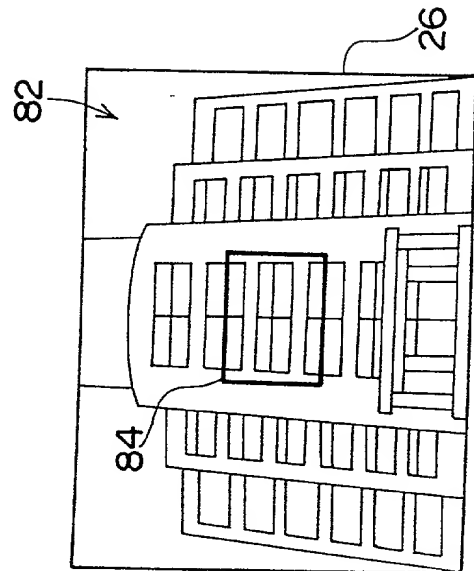
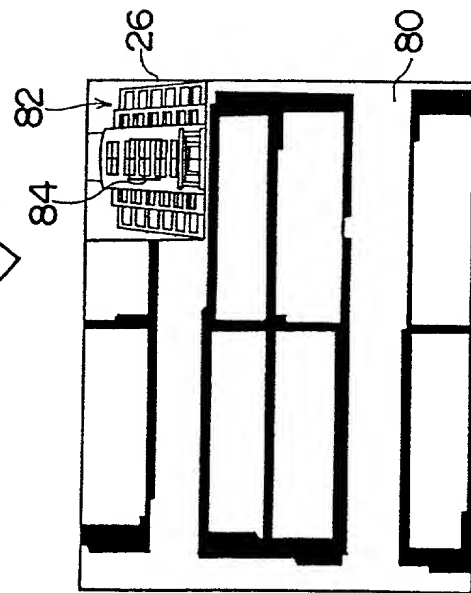

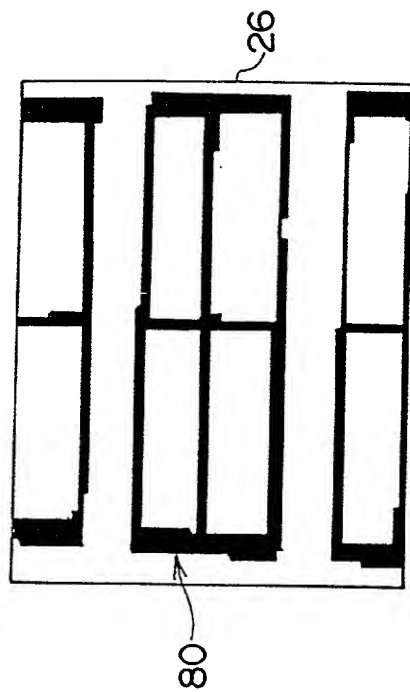


FIG. 7

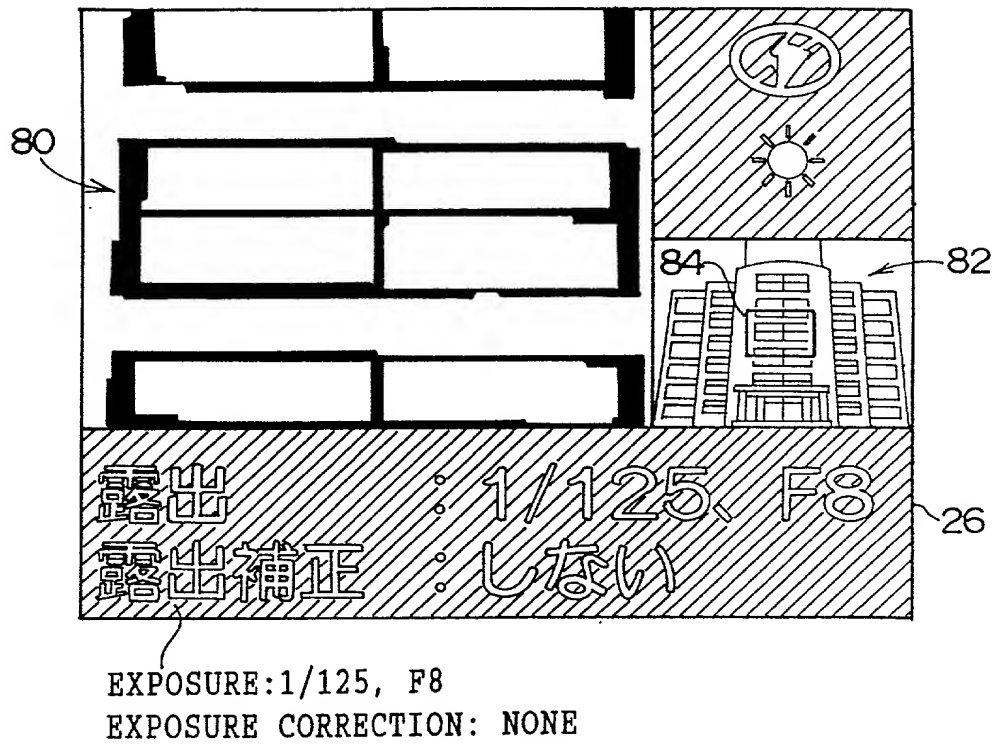


FIG. 8 A

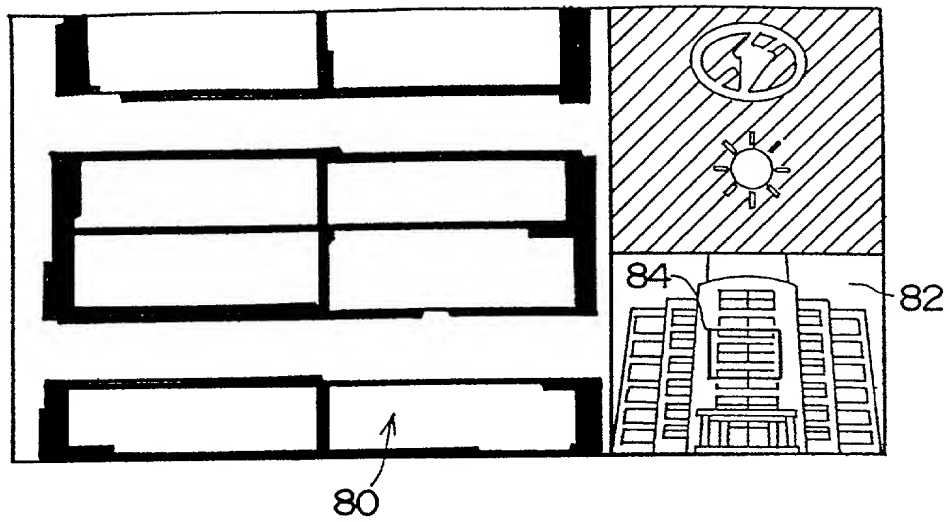


FIG. 8 B

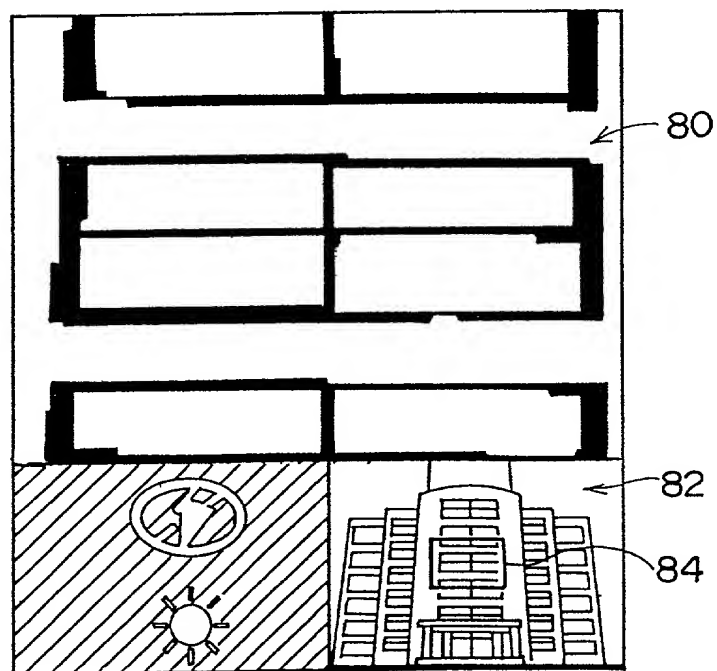


FIG. 9A

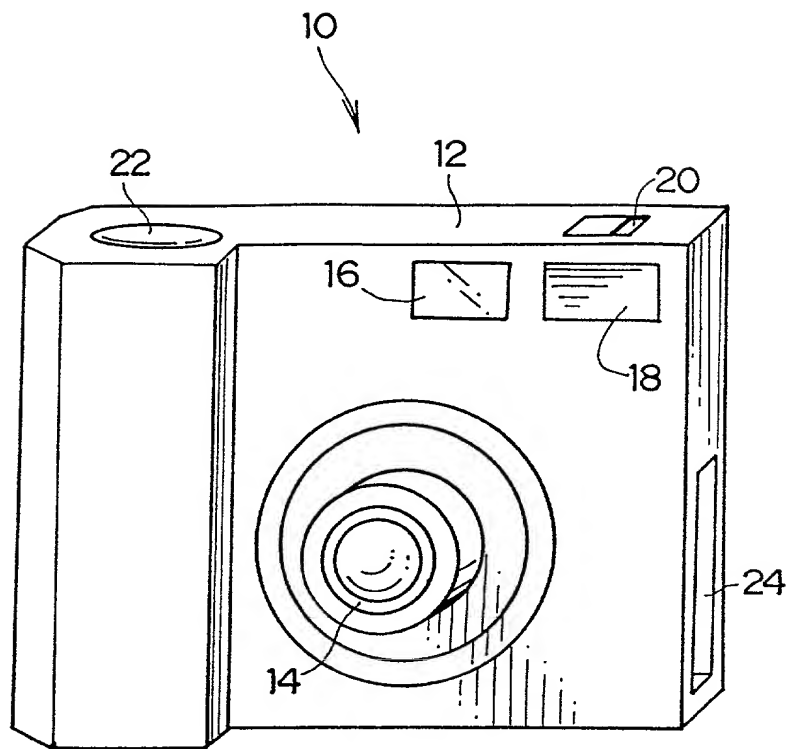


FIG. 9B


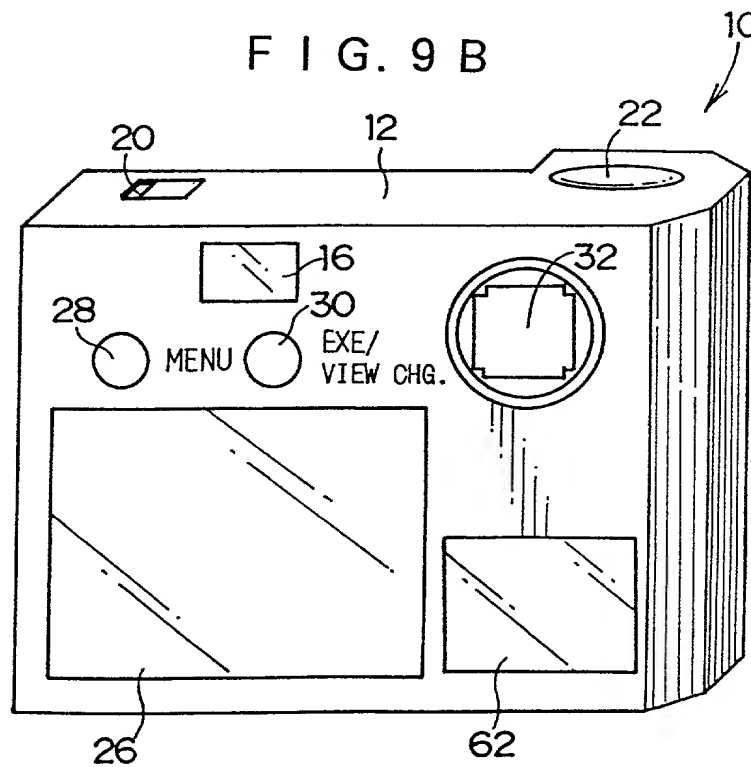


FIG. 10

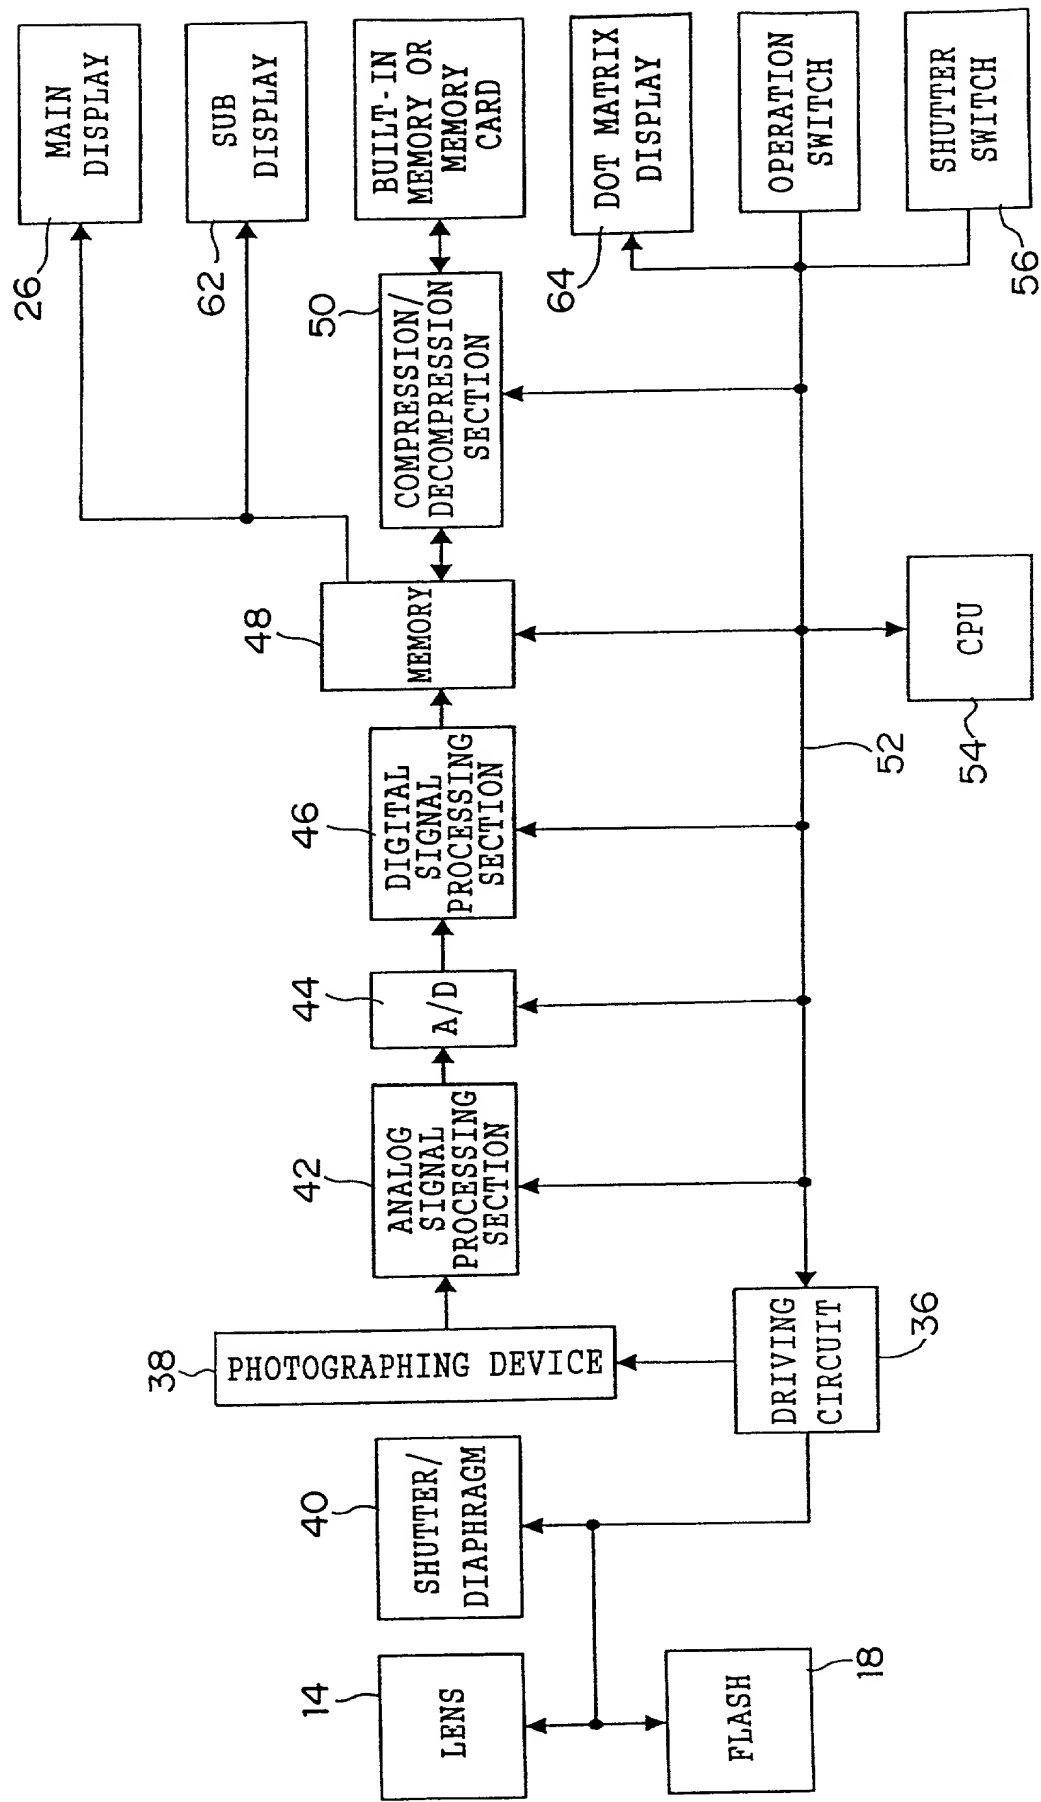

•



Table 1. (continued)	
Variable	Value
β_1	0.00
β_2	0.00
β_3	0.00
β_4	0.00
β_5	0.00
β_6	0.00
β_7	0.00
β_8	0.00
β_9	0.00
β_{10}	0.00
β_{11}	0.00
β_{12}	0.00
β_{13}	0.00
β_{14}	0.00
β_{15}	0.00
β_{16}	0.00
β_{17}	0.00
β_{18}	0.00
β_{19}	0.00
β_{20}	0.00
β_{21}	0.00
β_{22}	0.00
β_{23}	0.00
β_{24}	0.00
β_{25}	0.00
β_{26}	0.00
β_{27}	0.00
β_{28}	0.00
β_{29}	0.00
β_{30}	0.00
β_{31}	0.00
β_{32}	0.00
β_{33}	0.00
β_{34}	0.00
β_{35}	0.00
β_{36}	0.00
β_{37}	0.00
β_{38}	0.00
β_{39}	0.00
β_{40}	0.00
β_{41}	0.00
β_{42}	0.00
β_{43}	0.00
β_{44}	0.00
β_{45}	0.00
β_{46}	0.00
β_{47}	0.00
β_{48}	0.00
β_{49}	0.00
β_{50}	0.00
β_{51}	0.00
β_{52}	0.00
β_{53}	0.00
β_{54}	0.00
β_{55}	0.00
β_{56}	0.00
β_{57}	0.00
β_{58}	0.00
β_{59}	0.00
β_{60}	0.00
β_{61}	0.00
β_{62}	0.00
β_{63}	0.00
β_{64}	0.00
β_{65}	0.00
β_{66}	0.00
β_{67}	0.00
β_{68}	0.00
β_{69}	0.00
β_{70}	0.00
β_{71}	0.00
β_{72}	0.00
β_{73}	0.00
β_{74}	0.00
β_{75}	0.00
β_{76}	0.00
β_{77}	0.00
β_{78}	0.00
β_{79}	0.00
β_{80}	0.00
β_{81}	0.00
β_{82}	0.00
β_{83}	0.00
β_{84}	0.00
β_{85}	0.00
β_{86}	0.00
β_{87}	0.00
β_{88}	0.00
β_{89}	0.00
β_{90}	0.00
β_{91}	0.00
β_{92}	0.00
β_{93}	0.00
β_{94}	0.00
β_{95}	0.00
β_{96}	0.00
β_{97}	0.00
β_{98}	0.00
β_{99}	0.00
β_{100}	0.00



Table 1. (continued)	
Variable	Value
β_1 (1990-1999)	0.00
β_2 (2000-2009)	0.00
β_3 (2010-2019)	0.00
β_4 (2020-2029)	0.00
β_5 (2030-2039)	0.00
β_6 (2040-2049)	0.00
β_7 (2050-2059)	0.00
β_8 (2060-2069)	0.00
β_9 (2070-2079)	0.00
β_{10} (2080-2089)	0.00
β_{11} (2090-2099)	0.00
β_{12} (2100-2109)	0.00
β_{13} (2110-2119)	0.00
β_{14} (2120-2129)	0.00
β_{15} (2130-2139)	0.00
β_{16} (2140-2149)	0.00
β_{17} (2150-2159)	0.00
β_{18} (2160-2169)	0.00
β_{19} (2170-2179)	0.00
β_{20} (2180-2189)	0.00
β_{21} (2190-2199)	0.00
β_{22} (2200-2209)	0.00
β_{23} (2210-2219)	0.00
β_{24} (2220-2229)	0.00
β_{25} (2230-2239)	0.00
β_{26} (2240-2249)	0.00
β_{27} (2250-2259)	0.00
β_{28} (2260-2269)	0.00
β_{29} (2270-2279)	0.00
β_{30} (2280-2289)	0.00
β_{31} (2290-2299)	0.00
β_{32} (2300-2309)	0.00
β_{33} (2310-2319)	0.00
β_{34} (2320-2329)	0.00
β_{35} (2330-2339)	0.00
β_{36} (2340-2349)	0.00
β_{37} (2350-2359)	0.00
β_{38} (2360-2369)	0.00
β_{39} (2370-2379)	0.00
β_{40} (2380-2389)	0.00
β_{41} (2390-2399)	0.00
β_{42} (2400-2409)	0.00
β_{43} (2410-2419)	0.00
β_{44} (2420-2429)	0.00
β_{45} (2430-2439)	0.00
β_{46} (2440-2449)	0.00
β_{47} (2450-2459)	0.00
β_{48} (2460-2469)	0.00
β_{49} (2470-2479)	0.00
β_{50} (2480-2489)	0.00
β_{51} (2490-2499)	0.00
β_{52} (2500-2509)	0.00
β_{53} (2510-2519)	0.00
β_{54} (2520-2529)	0.00
β_{55} (2530-2539)	0.00
β_{56} (2540-2549)	0.00
β_{57} (2550-2559)	0.00
β_{58} (2560-2569)	0.00
β_{59} (2570-2579)	0.00
β_{60} (2580-2589)	0.00
β_{61} (2590-2599)	0.00
β_{62} (2600-2609)	0.00
β_{63} (2610-2619)	0.00
β_{64} (2620-2629)	0.00
β_{65} (2630-2639)	0.00
β_{66} (2640-2649)	0.00
β_{67} (2650-2659)	0.00
β_{68} (2660-2669)	0.00
β_{69} (2670-2679)	0.00
β_{70} (2680-2689)	0.00
β_{71} (2690-2699)	0.00
β_{72} (2700-2709)	0.00
β_{73} (2710-2719)	0.00
β_{74} (2720-2729)	0.00
β_{75} (2730-2739)	0.00
β_{76} (2740-2749)	0.00
β_{77} (2750-2759)	0.00
β_{78} (2760-2769)	0.00
β_{79} (2770-2779)	0.00
β_{80} (2780-2789)	0.00
β_{81} (2790-2799)	0.00
β_{82} (2800-2809)	0.00
β_{83} (2810-2819)	0.00
β_{84} (2820-2829)	0.00
β_{85} (2830-2839)	0.00
β_{86} (2840-2849)	0.00
β_{87} (2850-2859)	0.00
β_{88} (2860-2869)	0.00
β_{89} (2870-2879)	0.00
β_{90} (2880-2889)	0.00
β_{91} (2890-2899)	0.00
β_{92} (2900-2909)	0.00
β_{93} (2910-2919)	0.00
β_{94} (2920-2929)	0.00
β_{95} (2930-2939)	0.00
β_{96} (2940-2949)	0.00
β_{97}	

FIG. 12

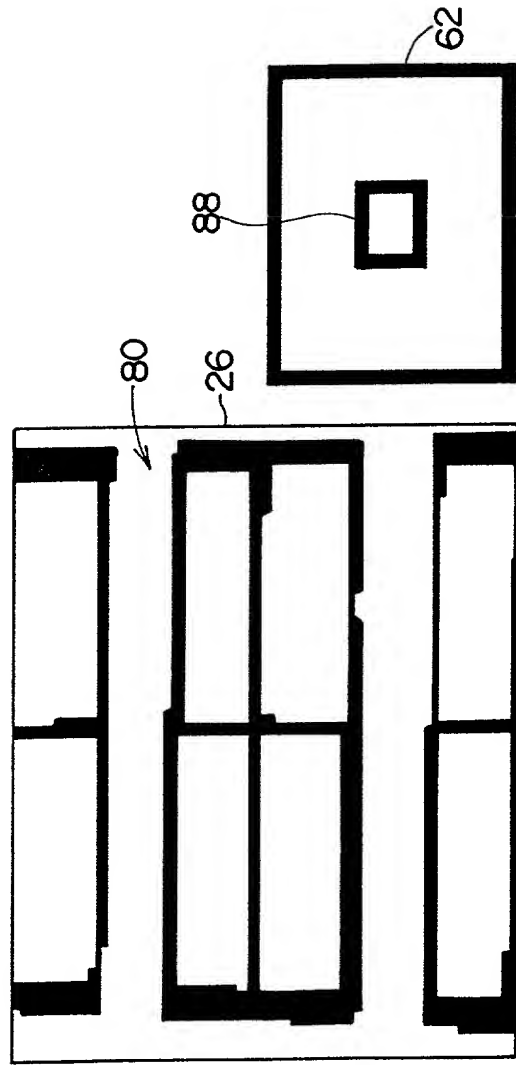
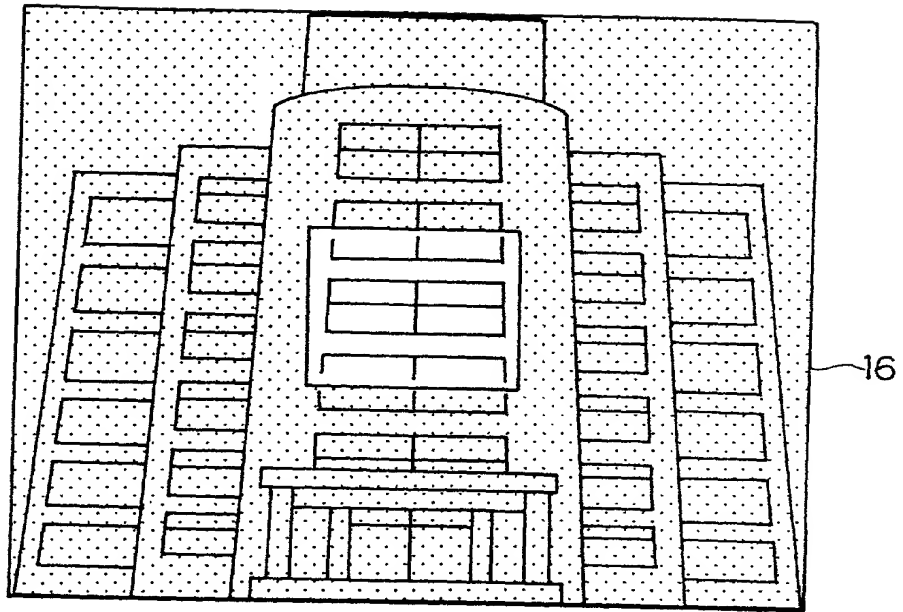


FIG. 13



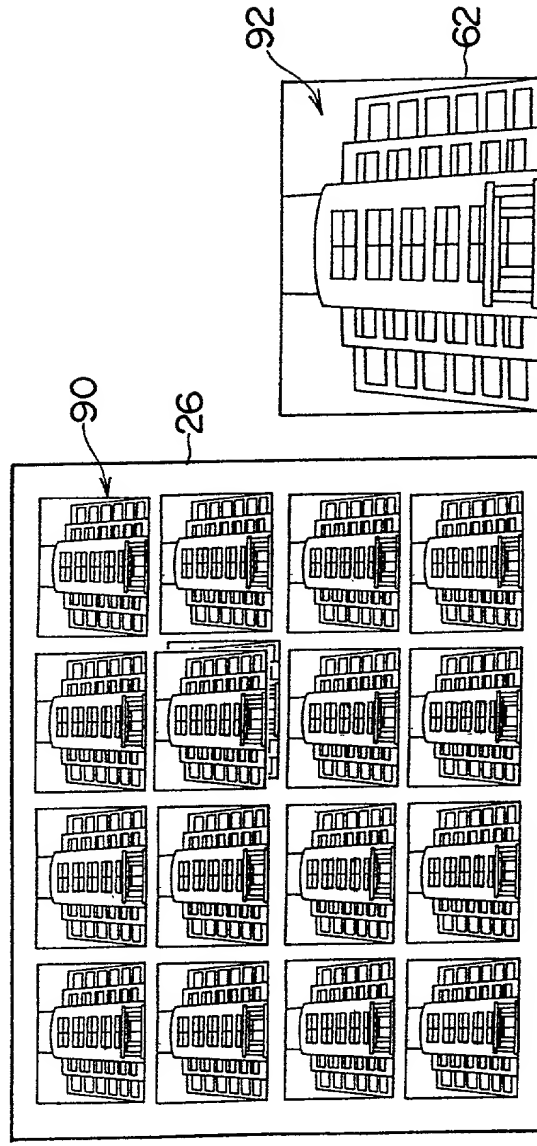


FIG. 14 A

FIG. 14 B

FIG. 15

70 ↗


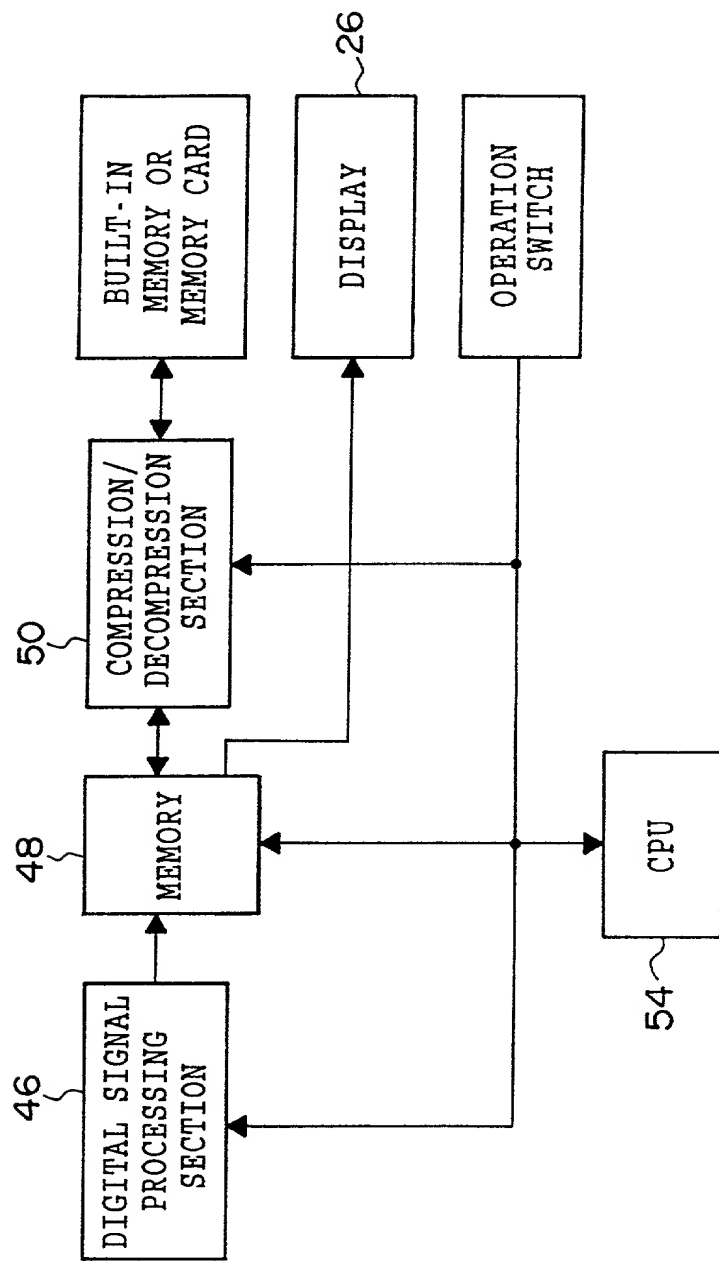


FIG. 16

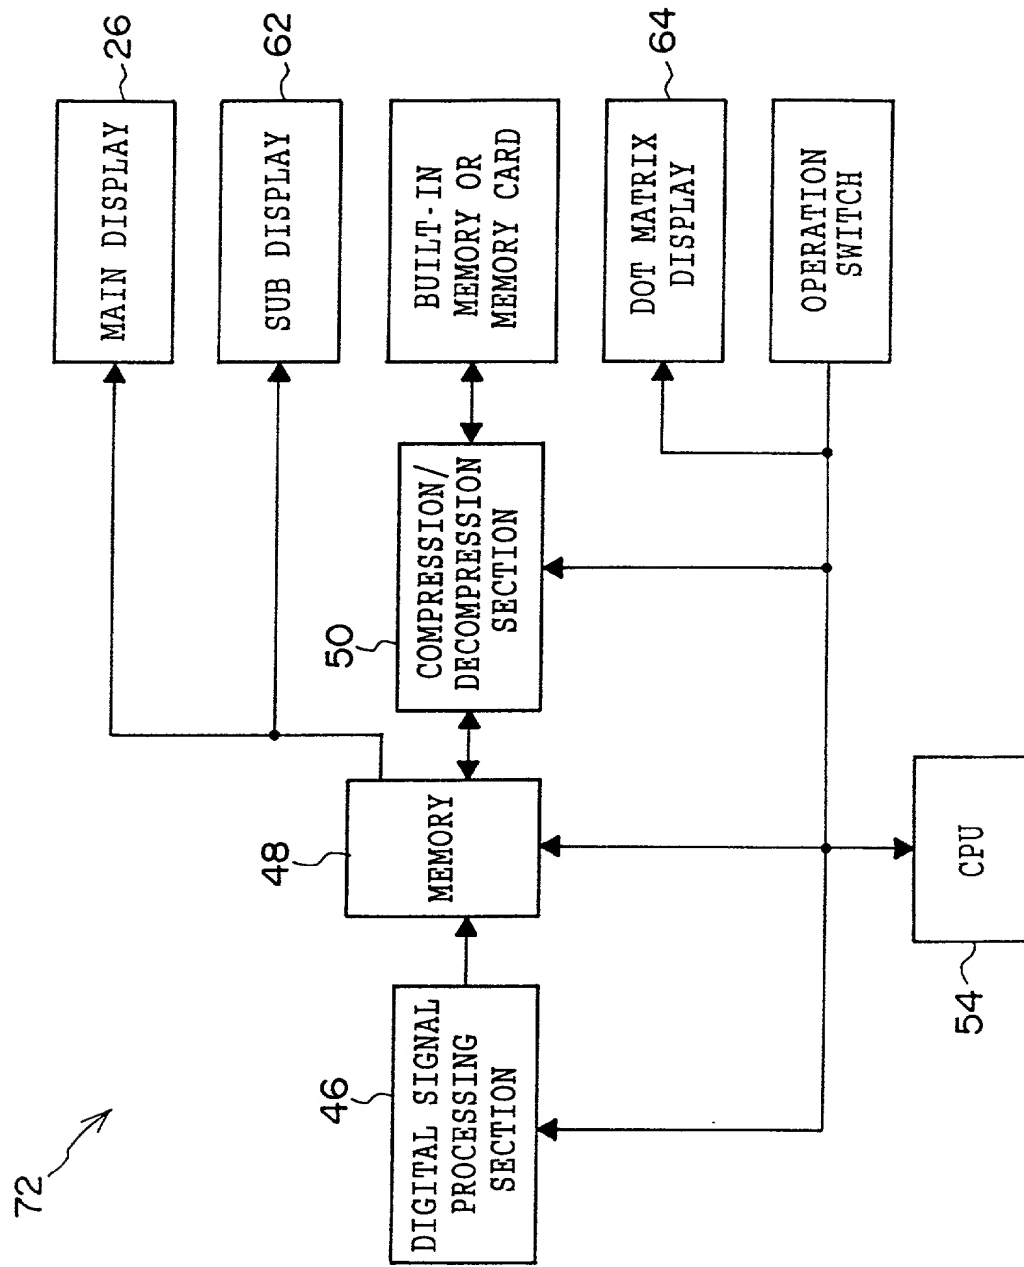

BIRCH, STEWART, KOLASCH & BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747
 Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:
 YOU MUST
 COMPLETE THE
 FOLLOWING

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

IMAGING SYSTEM

Insert Title:

Fill in Appropriate
 Information -
 For Use Without
 Specification
 Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on _____ as
 United States Application Number _____;
 and amended on _____ (if applicable) and/or
 the specification was filed on _____ as PCT
 International Application Number _____; and was
 amended under PCT Article 19 on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

Insert Priority
 Information
 (if appropriate)

<u>11-218406</u>	<u>Japan</u>	<u>August/2/1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional applications(s) listed below.

Insert Provisional
 Application(s)
 (if any)

_____	_____
(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Country	Application Number	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

Insert Requested
 Information.
 (if appropriate)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Insert Prior U S
 Application(s)
 (if any)

_____	_____	_____
(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
_____	_____	_____
(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)

Attorney Docket No.

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart	(Reg. No. 21,066)	Terrell C. Birch	(Reg. No. 19,382)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	Donald J. Daley	(Reg. No. 34,313)
John W. Bailey	(Reg. No. 32,881)	John A. Castellano	(Reg. No. 35,094)
Gary D. Yacura	(Reg. No. 35,416)		

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP or **Customer No. 2292**
P.O. Box 747 • Falls Church, Virginia 22040-0747
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:

YOU MUST
COMPLETE
THE
FOLLOWING:
↓

Full Name of First
or Sole Inventor
Insert Name of
Inventor
Insert Date This
Document is Signed →

Insert Residence
Insert Citizenship →

Insert Post Office
Address →

Full Name of Second
Inventor, if any
see above

Full Name of Third
Inventor, if any
see above

Full Name of Fourth
Inventor, if any
see above

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

GIVEN NAME/FAMILY NAME Takeshi Misawa	INVENTOR'S SIGNATURE <i>Takeshi Misawa</i>	DATE* July 19, 2000
Residence (City, State & Country) Asaka-shi, Saitama-ken, Japan		CITIZENSHIP Japanese
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) c/o FUJI PHOTO FILM CO., LTD. of 11-46, Senzui 3-chome, Asaka-shi, Saitama-ken, Japan		
GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		
GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		
GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		